



**FTD**

# Post Bin Mixer >>

Mixing Machine Series

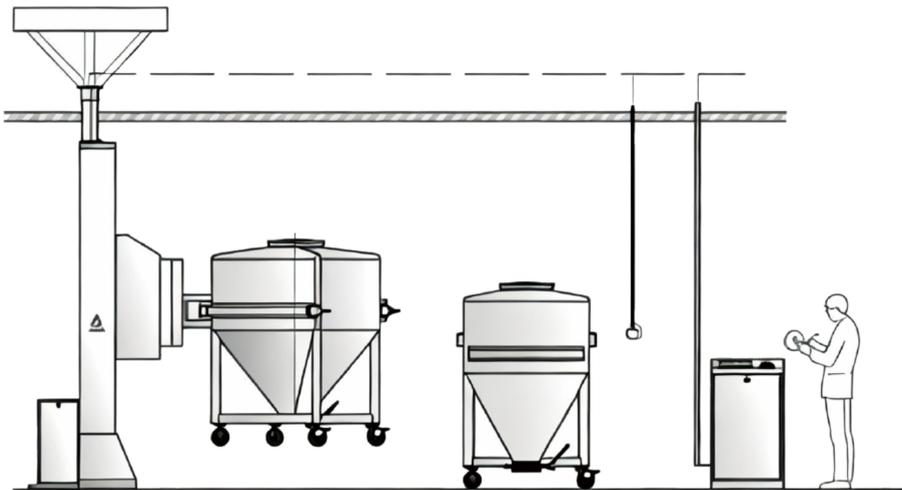

- PLC auto-control, man-machine interface operation
- Infrared device protects mixing working area
- Safety chains: hopper, positioning, deceleration, etc.
- High efficiency, multi-volume hoppers, continuous mixing
- EU CE certified, patented, mature excellent quality
- Meets GMP requirements for pharmaceutical production

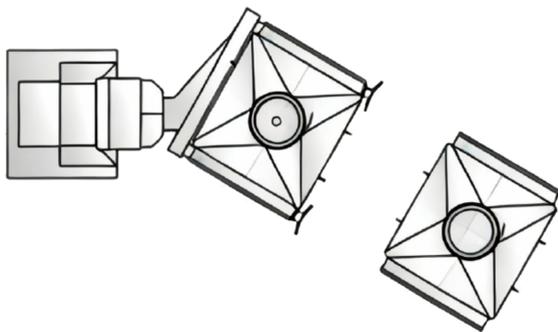

Model	Static size			Dynamic size			Lifting Height	Net Load	Mixing speed	Total power	Hopper weight	Equipment weight
	L	W	L	L	W1	H1	H2	Kg	rpm	Kw	Kg	Kg
FTD100	2040	991	1850	2040	1600	1600	200	50	3-15	2.6	60	700
FTD200	2400	1130	1950	2400	1800	1900	250	100	3-15	3	90	1050
FTD300	2500	1260	2000	2500	1950	2100	300	150	3-15	3	105	1100
FTD400	2675	1430	2200	2675	2250	2350	300	200	3-15	5.2	141	1300
FTD600	2940	1620	2500	2940	2500	2550	300	300	3-15	5.2	160	1550
FTD800	3027	1732	2900	3027	2800	2800	300	400	3-15	6.2	192	1700
FTD1000	3225	1915	3000	3225	3000	2950	400	500	3-15	6.2	226	1800
FTD1200	3495	1960	3200	3495	3000	3200	400	600	3-8	7	273	2100
FTD1500	3565	2075	3400	3565	3400	3400	450	750	3-8	7	306	2200
FTD2000	3915	2385	3800	3915	3500	3800	550	1000	3-8	8.5	480	3600
FTD2500	4050	2555	4000	4050	2555	3800	550	1250	3-8	8.5	635	4000
FTD3000	4200	2680	4200	4200	4100	4200	750	1500	3-8	11.5	785	4400